WAFER BUTTERFLY VALVE
MODEL FIG061 - FIG062

PRODUCTION STANDARDS

MODEL FIG061-062 I DN50 - DN600
PN10 - PN16

Design	BS Standard
Flange	BS Standard
Face to Face	SO 5752 series 20
Tests	ISO 6755
Pressure Class	PN 10/16
Corrosion Protection	Electrostatic Powder Epoxy

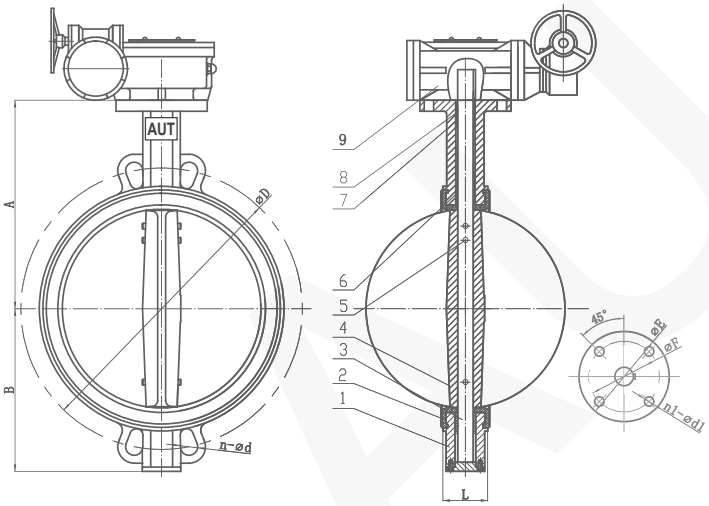

MATERIAL SELECTION

NO	Parts	Materials
1	Body	DI
2	Stem	EPDM
3	Diso	SS410
4	Seat	SS304
5	Bushing	SS304
6	Tapper pin	Polymer
7	O ring	Polymer
8	Lever	EPDM
9	Wormgear	DI

DIMENTIONS

Size		L	A	B	IOS6211				PN10		PN16		150LB		JIS 10K	
mm	in				Top flange	ØE	ØF	n1-Ød1	ØD	n-Ød	ØD	n-Ød	ØD	n-Ød	ØD	n-Ød
350	14	78	336	265	F10	125	102	4-12	460	16-22	470	16-26	476.3	12-29	55	16-25
400	16	86	405	329	F14	175	140	4-18	515	16-26	525	16-30	539.5	16-29	510	16-27
450	18	102	415	355	F14	175	140	4-18	565	20-26	585	20-30	577.9	16-32	565	20-27
500	20	127	460	390	F14	175	140	4-18	620	20-26	650	20-33	635	20-32	620	20-27
600	24	154	535	435	F16	210	165	4-22	725	20-30	770	20-36	749.3	20-35	730	24-33